


Typical 4-6 ACH/HR  
Rooms - space conditions  
need additional cooling by  
intermittent direct air supply

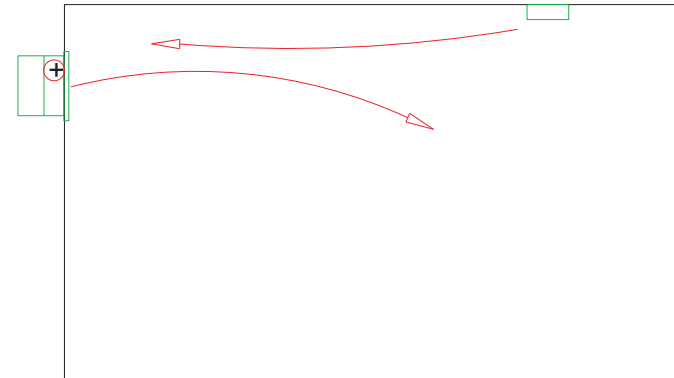

Side view

- CVR System powered constant volume regulator
- MD Motorised damper
- ⊕ Electric heater in diffuser
- OS BEMS outstation
- TD Temperature sensor and set point adjustment