


Typical 12-15 ACH/HR
 Rooms - space conditions
 maintained by both FES system
 and continuous direct air supply

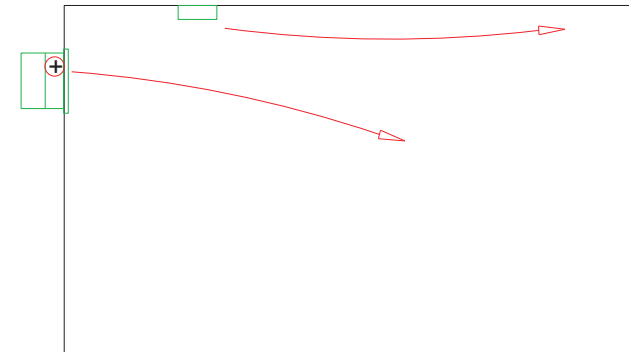

Side view

- CVR System powered constant volume regulator
- MD Motorised damper
- ⊕ Electric heater in diffuser
- OS BEMS outstation
- TD Temperature sensor and set point adjustment